

# NARRABRI MINE NOISE MONITORING

**Quarter Ending December 2019  
Summary Noise Report**

**Prepared for:**

Whitehaven Coal Mining Limited  
Whitehaven Coal Admin Office  
10409 Kamilaroi Hwy  
GUNNEDAH NSW 2380

SLR Ref: 610.18063-R07  
Version No: -v1.0  
January 2020



## PREPARED BY

SLR Consulting Australia Pty Ltd  
ABN 29 001 584 612  
Grd Floor, 2 Lincoln Street  
Lane Cove NSW 2066 Australia  
(PO Box 176 Lane Cove NSW 1595 Australia)  
T: +61 2 9427 8100  
E: sydney@slrconsulting.com www.slrconsulting.com

## BASIS OF REPORT

This report has been prepared by SLR Consulting Australia Pty Ltd (SLR) with all reasonable skill, care and diligence, and taking account of the timescale and resources allocated to it by agreement with Whitehaven Coal Mining Limited (the Client). Information reported herein is based on the interpretation of data collected, which has been accepted in good faith as being accurate and valid.

This report is for the exclusive use of the Client. No warranties or guarantees are expressed or should be inferred by any third parties. This report may not be relied upon by other parties without written consent from SLR.

SLR disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the work.

## DOCUMENT CONTROL

Reference	Date	Prepared	Checked	Authorised
610.18063-R07-v1.0	9 January 2020	Adam Sirianni	Martin Davenport	Martin Davenport

## CONTENTS

<b>1</b>	<b>INTRODUCTION .....</b>	<b>5</b>
<b>2</b>	<b>PERFORMANCE ASSESSMENT AND DISCUSSION .....</b>	<b>5</b>
<b>3</b>	<b>NOISE CRITERIA .....</b>	<b>7</b>
3.1	Project Approval, EPL and NMP .....	7
3.2	Non-compliances & Exemptions.....	7
3.3	Attended Monitoring.....	8
	EPL Monitoring Locations.....	8
	NMP Monitoring Locations .....	8
	EPL Monitoring Requirements .....	8
	NMP Monitoring Requirements .....	8
<b>4</b>	<b>OPERATIONAL NOISE MONITORING METHODOLOGY .....</b>	<b>9</b>
4.1	General Requirements.....	9
4.2	Methodology - Operator Attended Noise Monitoring .....	9
<b>5</b>	<b>RESULTS AND DISCUSSION.....</b>	<b>12</b>
5.1	Results of Operator Attended Monitoring .....	12
5.1.1	Operator Attended Noise Survey Results – EPL Monitoring Location N5.....	13
5.1.2	Operator Attended Noise Survey Results – EPL Monitoring Location N6.....	17
5.1.3	Operator Attended Noise Survey Results – EPL Monitoring Location N8.....	21
5.1.4	Operator Attended Noise Survey Results – EPL Monitoring Location N9.....	25
5.1.5	Operator Attended Noise Survey Results – NMP Monitoring Location N1 .....	29
5.1.6	Operator Attended Noise Survey Results – NMP Monitoring Location N3 .....	30
5.1.7	Operator Attended Noise Survey Results – NMP Monitoring Location N7 .....	31
5.1.8	Operator Attended Noise Survey Results – NMP Monitoring Location N8 .....	32
<b>6</b>	<b>CONCLUSION.....</b>	<b>33</b>

## DOCUMENT REFERENCES

### TABLES

Table 1	Performance Assessment – Operations .....	6
Table 2	Project Approval and EPL Noise Criteria .....	7
Table 3	Noise Monitoring Locations .....	9
Table 4	Days of the Week Quarterly EPL Monitoring was Conducted – Q4 2019 .....	12
Table 5	Operator Attended EPL Noise Survey Results – N5 – Oakleigh (Day 1) .....	13
Table 6	Operator Attended EPL Noise Survey Results – N5 – Oakleigh (Day 2) .....	15
Table 7	Operator Attended EPL Noise Survey Results – N5 – Oakleigh (Day 3) .....	16
Table 8	Operator Attended EPL Noise Survey Results – N6 – Newhaven (Day 1) .....	17

---

## CONTENTS

Table 9	Operator Attended EPL Noise Survey Results – N6 – Newhaven (Day 2) .....	19
Table 10	Operator Attended EPL Noise Survey Results – N6 – Newhaven (Day 3) .....	20
Table 11	Operator Attended EPL Noise Survey Results – N8 – Haylin View (Day 1) .....	21
Table 12	Operator Attended EPL Noise Survey Results – N8 – Haylin View (Day 2) .....	23
Table 13	Operator Attended EPL Noise Survey Results – N8 – Haylin View (Day 3) .....	24
Table 14	Operator Attended EPL Noise Survey Results – N9 – High Range (Day 1) .....	25
Table 15	Operator Attended EPL Noise Survey Results – N9 – High Range (Day 2) .....	27
Table 16	Operator Attended EPL Noise Survey Results – N9 – High Range (Day 3) .....	28
Table 17	Operator Attended NMP Noise Survey Results – N1 – Bow Hills .....	29
Table 18	Operator Attended NMP Noise Survey Results – N3 – Ardmona .....	30
Table 19	Operator Attended NMP Noise Survey Results – N7 – Merriman .....	31
Table 20	Operator Attended NMP Noise Survey Results – N8 – Matilda .....	32

## FIGURES

Figure 1	Attended Noise Monitoring Locations .....	11
----------	---	----

## APPENDICES

- Appendix A Acoustic Terminology
- Appendix B Calibration Certificates

## 1 Introduction

Narrabri Coal Operations Pty Ltd has commissioned SLR Consulting Australia Pty Ltd (SLR) to conduct operational noise monitoring for the Narrabri Mine located near Narrabri, New South Wales (NSW) in accordance with the approved Noise Management Plan (NMP) dated June 2018, the Narrabri Mine Project Approval (PA) 08\_0144 and the Environment Protection Licence 12789 dated 19 January 2017 (EPL 12789).

The objectives of the noise monitoring programme for this operating period were as follows:

- Conduct operator attended noise surveys at 6 locations (as listed in **Section 3.3**) surrounding the mine during the day, evening and night-time periods.
- Quantify all sources of noise within each of the attended noise surveys, including their measured and/or estimated contribution and maximum level of individual noise sources.
- Assess the noise emissions of Narrabri Mine and determine compliance with respect to the limits contained in Section 2 of the NMP.

The following report uses specialist acoustic terminology. An explanation of common terms is provided in **Appendix A**.

## 2 PERFORMANCE ASSESSMENT AND DISCUSSION

The following provides a summary of the attended noise measurements undertaken at each monitoring location. Further details are provided for each location in **Section 5** of this report.

**Table 1 Performance Assessment – Operations**

EPL ID	Location	Date	Narrabri Mine Contribution dBA				Noise Criteria <sup>2</sup>	Measurement Periods	Weather Compliant			Compliant		
			LAeq 15 min Day	LAeq 15 min Evening	LAeq 15 min Night	LA1 (1 min) Night			Day	Evening	Night			
N5	Oakleigh	18/11/2019	29	I/A	I/A	I/A	Day, Evening and Night – LAeq(15minute) 35 dBA  Night LA1(1minute) – 45 dBA	Day - 1.5 hrs	Y	Y	Y	Y		
		19/11/2019	I/A	I/A	N/M	N/M			Y	Y	Y	Y		
		20/11/2019	I/A	I/A	I/A	I/A			Y	Y	Y	Y		
N6	Newhaven	18/11/2019	I/A	24	26	29		Day, Evening and Night – LAeq(15minute) 35 dBA  Night LA1(1minute) – 45 dBA	Evening - 0.5 hrs	Y	Y	Y	Y	
		19/11/2019	25	29	25	28				Y	Y	N	Y	
		20/11/2019	I/A	<30	N/M	N/M				N	N	Y	Y	
N8	Haylin View	18/11/2019	I/A	I/A	I/A	I/A			Day, Evening and Night – LAeq(15minute) 35 dBA  Night LA1(1minute) – 45 dBA	Night – 1hrs	Y	Y	Y	Y
		19/11/2019	N/M	I/A	N/M	N/M					Y	Y	N	Y
		20/11/2019	24	I/A	I/A	I/A					Y	N	Y	Y
N9	High Range	18/11/2019	I/A	N/M	30	38	Day, Evening and Night – LAeq(15minute) 35 dBA  Night LA1(1minute) – 45 dBA			Night – 1hrs	Y	Y	Y	Y
		19/11/2019	25	26	N/M	N/M					Y	Y	Y	Y
		20/11/2019	N/M	N/M	N/M	N/M					N	N	Y	Y
N1	Bow Hills <sup>1</sup>	18/11/2019	I/A	34	32	38		Day 15 min		N	Y	N	Y	
N3	Ardmona	18/11/2019	I/A	<25	28	35				Evening 15 min	Y	Y	Y	Y
N7	Merriman	19/11/2019	I/A	I/A	27	28					Y	Y	N	Y
N8	Matilda	18/11/2019	I/A	I/A	I/A	I/A			Night 15 min		Y	Y	Y	Y

I/A = Inaudible, N/M = Not Measurable

Note 1: A private agreement between NCOPL and the residents of N1 Bow Hills of 50 dBA LAeq(15minute) is in place. This new level of 50 dBA LAeq(15minute) replaces the levels identified in Conditions 1-3, Schedule 4 of PA 08\_0144 Mod 2 and the identical limits contained in condition L3 of Environment Protection Licence No 12789

## 3 Noise Criteria

### 3.1 Project Approval, EPL and NMP

Noise monitoring at the Narrabri Mine was conducted in accordance with EPL 12789, the PA requirements and the NMP. The site specific EPL and PA noise limits are summarised in Section 2 of the NMP and are reproduced in **Table 2**.

**Table 2 Project Approval and EPL Noise Criteria**

Location	Day	Emergency Day	Night	
	LAeq(15minute)	LAeq(15minute)	LAeq(15minute)	LA1(1minute)
All Privately owned Residences	35	35	35	45

### 3.2 Non-compliances & Exemptions

In accordance with Section 11.1.3 of the NSW Industrial Noise Policy (INP) a development is deemed to be in non-compliance with a noise consent or licence condition if the monitored noise level is more than 2 dB above the statutory noise limit specified in the consent or licence. This may occur for two reasons:

- The noise from the Narrabri Mine is excessive, in which case Narrabri Mine will be not complying with its consent or licence condition.
- The noise was increased by extreme, non-standard weather effects—in which case the Narrabri Mine is not considered to be in noncompliance with its consent or licence condition.

In this latter case, further monitoring at a later date is required to determine compliance under “normal” meteorological conditions.

The INP states in Section 9.2 that *“it is not practicable to meet the noise limit under all inversion events; hence exceedances under extreme temperature inversions are not considered to be a non-compliance with consent or licence conditions.”*

Non-standard weather effects include:

- Wind speeds greater than 3 m/s at 10m above ground level; or
- Stability category F temperature inversion conditions and wind speeds greater than 2 m/s at 10 metres above ground level; or
- Stability category G temperature inversion conditions

As stated in EPL 12789 *“Data recorded by the meteorological station identified as EPA Identification Point(s) W1 must be used to determine meteorological conditions and temperature inversion conditions (stability category) are to be determined by direct measurement over a minimum 50m height interval as referred to in Part E2 of Appendix E of the “New South Wales Industrial Noise Policy” dated January 2000 ISBN 0 7313 2715 2.”*

Weather and Temperature inversion monitoring is undertaken continuously in accordance with EPL 12789 with monitoring locations displayed in **Figure 1**. Monitoring Location W1 records wind speed and direction at 10m above ground level. Temperature inversion monitoring is undertaken continuously by directly measuring temperature at two elevations 50m apart (10m & 60m from ground level) at monitoring location W2. All weather data reported in **Table 5** to **Table 20** have been recorded at these monitoring locations.

### 3.3 Attended Monitoring

Attended Noise monitoring is to be undertaken on a quarterly basis at residential areas. The attended monitoring will take place at the following locations:

#### EPL Monitoring Locations

- N5 Oakleigh – 16293 Kamilaroi Highway Baan Baa
- N6 Newhaven – 184 Greylands Road Turrawan
- N8 Haylin View – 791 Mayfield Road Baan Baa
- N9 High Range – 92 Davis Road Turrawan

EPL also requires monitoring at N8 Haylin View to be conducted quarterly when surface activities approach the eastern end of the southern longwall panels. Works have commenced within the eastern end of the southern longwall, and as such monitoring at N8 Haylin View has been undertaken.

#### NMP Monitoring Locations

- N1 Bow Hills – 16652 Kamilaroi Highway Baan Baa
- N3 Ardmona – 16462 Kamilaroi Highway Baan Baa
- N7 Merriman – 16896 Kamilaroi Highway Baan Baa
- N8 Matilda – 773 Mayfield Road Baan Baa

The following details the requirements of the monitoring:

#### EPL Monitoring Requirements

- At each one of the monitoring locations N5 and N6
- Occur quarterly in a reporting period;
- Occur during each day, evening and night period as defined in the NSW Industrial Noise Policy for a minimum of:
  - i) 1.5 hours during the day;
  - ii) 30 minutes during the evening; and
  - iii) 1 hour during the night.
- Occur for three consecutive operating days.

#### NMP Monitoring Requirements

- At each one of the monitoring locations N1, N3, N7 and N8



- Occur quarterly in a reporting period; and
- Occur during a day, evening and night period as defined in the NSW Industrial Noise Policy for a minimum 15 minutes.

## 4 Operational Noise Monitoring Methodology

### 4.1 General Requirements

All acoustic instrumentation employed throughout the monitoring programme has been designed to comply with the requirements of AS IEC 61672.1 – 2004 *Electroacoustics—Sound level meters – Specifications*, AS IEC 61672.2-2004, AS IEC 61672.3-2004 and carried current NATA or manufacturer calibration certificates. Instrument calibration was checked before and after each measurement survey, with the variation in calibrated levels not exceeding  $\pm 0.5$  dBA. Calibration certificates for all instruments employed during the monitoring campaign are presented in **Appendix B**.

### 4.2 Methodology - Operator Attended Noise Monitoring

Operator attended noise measurements were conducted during the day, evening and night-time periods for a minimum of 1.5 hours during the day; 30 minutes during the evening and 1 hour during the night at the four EPL nominated noise monitoring locations and for 15 minutes during the day, evening and night at each of the NMP nominated noise monitoring location representing the most affected receiver locations, listed in **Table 3** and shown in **Figure 1**. During the operator attended noise measurements, the character and relative contribution of ambient noise sources and mine contributions were determined.

**Table 3 Noise Monitoring Locations**


Monitoring Location	Monitoring Requirements	Receiver Type	Address	Monitoring Location - MGA Zone 55	
				Easting (m)	Northing (m)
N5	EPL	Residence	Oakleigh – 16293 Kamilaroi Highway Baan Baa	779526	6617751
N6	EPL	Residence	Newhaven – 184 Greylands Road Turrawan	776564	6624643
N8 <sup>1</sup>	EPL	Residence	Haylin View - 791 Mayfield Road Baan Baa	777428	6617316
N9	EPL	Residence	High Range – 92 Davis Road Turrawan	775879	6625895
N1 <sup>2</sup>	NMP	Residence	Bow Hills – 16652 Kamilaroi Highway Baan Baa	780114	6620641
N3	NMP	Residence	Ardmona – 16462 Kamilaroi Highway Baan Baa	780233	6618836
N7	NMP	Residence	Merriman – 16896 Kamilaroi Highway Baan Baa	779290	6623143
N8	NMP	Residence	Matilda – 773 Mayfield Road Baan Baa	777815	6617045

Note: 1. EPL monitoring locations  
 2. NMP monitoring locations

The objective of the operator attended noise monitoring was to measure the ( $LA_{1(1\text{minute})}$ ) and the  $LA_{eq(15\text{minute})}$  noise level contribution from the Narrabri Mine at the nearest potentially affected receptors in order to determine the noise contribution of operational activities associated with Narrabri Mine over each 15 minute measurement period. In addition, the operator quantifies and characterises the overall levels of ambient noise in the area (i.e.  $L_{Amax}$ ,  $LA_1$ ,  $LA_{10}$ ,  $LA_{90}$ , and  $LA_{eq}$ ) over the 15 minute measurement interval.

Operator attended noise measurements were conducted using one-third octave integrating Brüel & Kjær Type 2250, 2250L and 2270 sound level meters (s/n 3011919, s/n3003389 and s/n 2679354 respectively).

**Figure 1 Attended Noise Monitoring Locations**

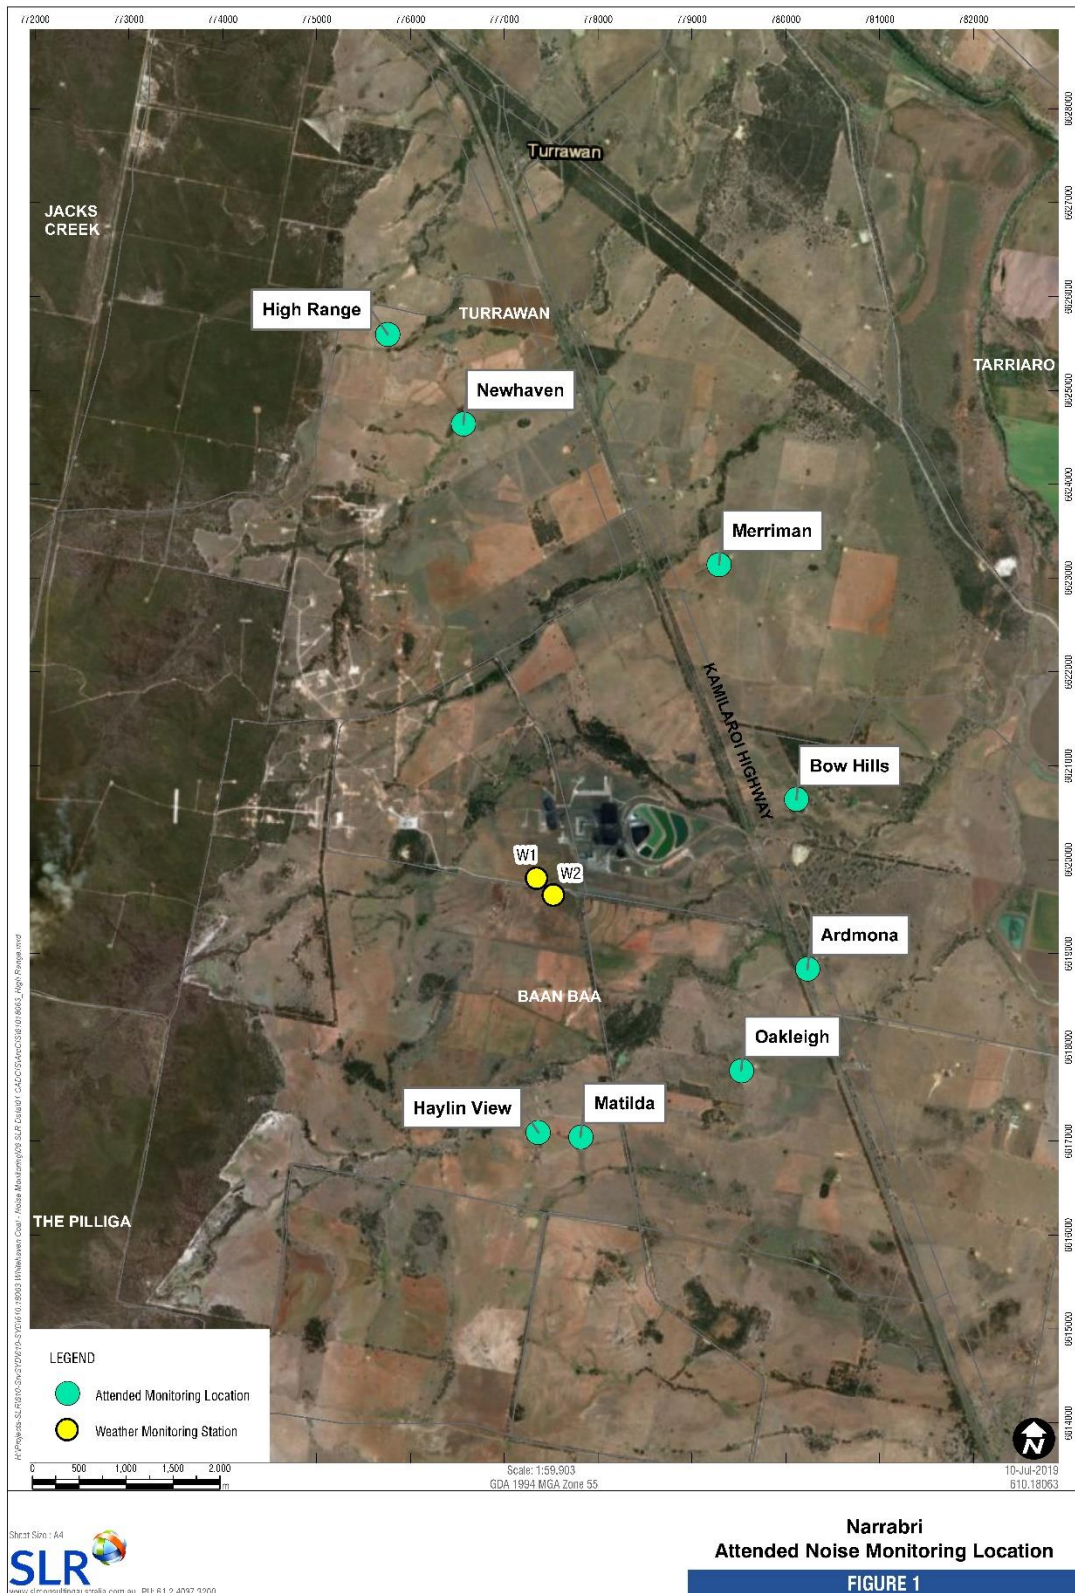

**Table 4** presents a summary of which days of the week the quarterly monitoring was conducted, in accordance with condition M7.4 of EPL 12789 and Section 5 of the NMP.

**Table 4 Days of the Week Quarterly EPL Monitoring was Conducted – Q4 2019**

Period	Day of the Week (Excluding Weekends and Public Holidays)				
	Monday	Tuesday	Wednesday	Thursday	Friday
Day	18 <sup>th</sup> November 2019	19 <sup>th</sup> November 2019	20 <sup>th</sup> November 2019		
Evening	18 <sup>th</sup> November 2019	19 <sup>th</sup> November 2019	20 <sup>th</sup> November 2019		
Night <sup>1</sup>	18 <sup>th</sup> November 2019	19 <sup>th</sup> November 2019	20 <sup>th</sup> November 2019		

Note 1: Taken to mean the night time period from 10:00 pm on the stated day to 7:00 am the following day.

## 5 Results and Discussion

### 5.1 Results of Operator Attended Monitoring

Results of the operator attended noise surveys at N5, N6, N8<sub>(EPL)</sub>, N9, N1, N3, N7 and N8<sub>(NML)</sub> are provided **Table 5** to **Table 20**.

Ambient noise levels presented include all noise sources such as transport (roads, rail and aircraft), fauna (insects, frogs, birds and bats), the natural environment (wind in trees), domestic noises, other industrial operations as well as Narrabri Mine noise emissions.

Weather data during the monitoring period has been obtained from the weather station located on the Narrabri Mine site and observed conditions.

The tables also provide the following information:

- Date and start time, operator and equipment details.
- Monitoring location.
- Wind velocity (m/s) and temperature (°C) at weather station W1, as detailed in **Section 3.2**.
- Typical maximum (L<sub>Amax</sub>) and contributed L<sub>Aeq(15minute)</sub> noise levels.

### 5.1.1 Operator Attended Noise Survey Results – EPL Monitoring Location N5

Results of the operator attended noise surveys at N5 are provided in **Table 5**, **Table 6** and **Table 7**. Monitoring location N5 represents residential receptors located to the southeast of the site in Oakleigh.

**Table 5 Operator Attended EPL Noise Survey Results – N5 – Oakleigh (Day 1)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 1 18/11/2019 8:37 0.6 – 2.3 m/s SE/NE 21-26 °C 3011919	35 dBA L <sub>Aeq</sub> (15minute)	1	B	77	52	44	27	44	23	28 L <sub>Aeq</sub>	<b>Site Related Noise Events:</b> General mine activity 24-30  <b>Other Noise Events:</b> Wind related noise 30-42 Birdsong 48-67
		2	B	84	60	45	26	54	23	29 L <sub>Aeq</sub>	
		3	A	71	55	46	27	44	24	26 L <sub>Aeq</sub>	
		4	A	72	60	45	26	47	23	25 L <sub>Aeq</sub>	
		5	A	63	47	39	26	36	23	N/M	
		6	A	58	43	36	26	33	24	N/M	
Evening 1 18/11/2019 20:09 2.3 - 2.9 m/s SW 24-27 °C 3011919	35 dBA L <sub>Aeq</sub> (15minute)	1	D	49	33	27	23	26	21	I/A	<b>Site Related Noise Events:</b> Inaudible  <b>Other Noise Events:</b> Insects 24-26 Bats 50-58 Wind related noise 38-51
		2	E	58	38	28	24	31	22	I/A	

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Night 1 19/11/2019 22:12 2.9 – 3.4 m/s SSW 24-25 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	E	46	36	29	24	27	22	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Insects 24-26 Wind related noise 28-31 Farm animal 40-50
	45 dBA LA <sub>1</sub> (1minute)	2	D	40	35	27	23	26	22	I/A	
		3	D	40	33	29	22	28	21	I/A	
		4	D	50	30	24	21	24	20	I/A	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 6 Operator Attended EPL Noise Survey Results – N5 – Oakleigh (Day 2)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 2 19/11/2019 08:34 0.4 - 2 m/s WSW/NE 27-30 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	A	76	49	33	25	45	23	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Wind related noise 30-42 Birdsong 48-76
		2	A	64	38	32	26	33	23	I/A	
		3	A	51	37	32	24	29	23	I/A	
		4	A	50	38	30	24	28	22	I/A	
		5	A	59	41	35	24	33	22	I/A	
		6	A	65	40	34	23	34	21	I/A	
Evening 2 19/11/2019 21:13 2.4 - 3 m/s SSW 27-30 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	E	45	34	27	21	25	20	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 26-31 Insects 21-24 Dogs 42-45
		2	E	44	32	25	20	24	19	I/A	
Night 2 20/11/2019 00:13 1.2 - 1.9 m/s NW 24-27 °C 3011919	35 dBA LA <sub>eq</sub> (15minute) 45 dBA LA <sub>1</sub> (1minute)	1	D	50	35	30	23	28	21	N/M	<b>Site Related Noise Events:</b> General mine activity barely audible <b>Other Noise Events:</b> Frogs / insects 24-28 Tin shed clunk 41-50
		2	E	45	39	32	22	28	21	N/M	
		3	F	42	37	31	25	28	23	I/A	
		4	F	48	37	28	23	27	22	I/A	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 7 Operator Attended EPL Noise Survey Results – N5 – Oakleigh (Day 3)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 3 20/11/2019 10:02 2.3 - 4.7 m/s ESE 32-36 °C 3003389	35 dBA LA <sub>eq</sub> (15minute)	1	B	58	44	33	24	32	22	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 29-34 Birds 45-58 Tin shed clunk 66-70 Farm animals 36-44
		2	A	51	37	32	25	30	23	I/A	
		3	B	70	44	37	24	37	21	I/A	
		4	B	66	45	34	25	35	23	I/A	
		5	C	45	39	35	25	31	22	I/A	
		6	C	49	45	41	28	37	24	I/A	
Evening 3 20/11/2019 20:54 3 – 4.2 m/s E/ESE 29-30 °C 3003389	35 dBA LA <sub>eq</sub> (15minute)	1	D	49	41	37	27	34	23	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 35-41 Tin shed clunk 48-56 Frogs / insects 25-28
		2	D	56	47	41	26	38	23	I/A	
Night 3 20/11/2019 22:01 2.3 – 3.4 m/s E/ESE 27-28 °C 3003389	35 dBA LA <sub>eq</sub> (15minute) 45 dBA LA <sub>1</sub> (1minute)	1	F	49	39	34	23	31	22	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Tin shed clunk 49-53 Road traffic 31-36 Frogs / insects 22-25
		2	E	53	42	39	27	35	25	I/A	
		3	D	51	44	42	36	40	32	I/A	
		4	D	46	41	40	34	37	32	I/A	

Note: N/M = Not Measurable, I/A = Inaudible



## 5.1.2 Operator Attended Noise Survey Results – EPL Monitoring Location N6

Results of the operator attended noise surveys at N6 are provided in **Table 8**, **Table 9** and **Table 10**. Monitoring location N6 represents residential receptors located to the northwest of the site in Newhaven.

**Table 8 Operator Attended EPL Noise Survey Results – N6 – Newhaven (Day 1)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 1 18/11/2019 09:09 0.6 - 3.6 m/s SE/W 22-26 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	A	71	59	49	26	46	23	I/A	<b>Site Related Noise Events:</b> Inaudible  <b>Other Noise Events:</b> Birds 35-71 Traffic 33 Aircraft 35-67
		2	A	65	52	42	27	40	24	I/A	
		3	A	69	55	46	28	44	23	I/A	
		4	A	75	54	46	28	43	22	I/A	
		5	A	62	51	39	30	39	26	I/A	
		6	A	62	55	43	28	42	24	I/A	
Evening 1 18/11/2019 20:57 2..5 – 2.8 m/s SSW 23-25 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	E	54	35	29	24	28	21	23 dBA	<b>Site Related Noise Events:</b> Dozer operations 24-30  <b>Other Noise Events:</b> Insects 23 Traffic 25-27
		2	E	39	30	28	25	27	24	24 dBA	

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Night 1 18/11/2019 23:11 1.3 – 4.1 m/s S/SSW 25 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute) 45 dBA L <sub>A1</sub> (1minute)	1	D	39	31	29	26	28	25	26 L <sub>Aeq</sub> 28 L <sub>A1</sub>	<b>Site Related Noise Events:</b> General mine activity 24-29  <b>Other Noise Events:</b> Traffic 25-35 Animals 39-42 Operator 44
		2	D	42	32	29	26	28	24	26 L <sub>Aeq</sub> 28 L <sub>A1</sub>	
		3	D	48	32	29	26	28	24	26 L <sub>Aeq</sub> 29 L <sub>A1</sub>	
		4	D	44	33	29	25	27	22	26 L <sub>Aeq</sub> 28 L <sub>A1</sub>	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 9 Operator Attended EPL Noise Survey Results – N6 – Newhaven (Day 2)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 2 19/11/2019 10:57 0.8 – 2.9 m/s N/NW 31-33 °C 2679354	35 dBA LA <sub>eq</sub> (15minute)	1	A	64	51	40	25	39	21	<25 LA <sub>eq</sub>	<b>Site Related Noise Events:</b> Main exhaust vent fan 20-25 <b>Other Noise Events:</b> Birds 40-66 Traffic 35-42 Wind 37-46 Aircraft 45-47
		2	A	62	53	44	26	41	23	<25 LA <sub>eq</sub>	
		3	A	54	45	37	25	34	23	<25 LA <sub>eq</sub>	
		4	A	60	51	37	27	38	22	<25 LA <sub>eq</sub>	
		5	A	64	56	42	26	43	22	<25 LA <sub>eq</sub>	
		6	A	66	58	46	26	45	21	25 LA <sub>eq</sub>	
Evening 2 19/11/2019 20:04 2.2 – 3.3 m/s SW 30-32 °C 2679354	35 dBA LA <sub>eq</sub> (15minute)	1	D	46	35	32	26	30	23	29 LA <sub>eq</sub>	<b>Site Related Noise Events:</b> Main exhaust vent fan 25-36 <b>Other Noise Events:</b> Aircraft 45-46 Animals 39 Resident 26
		2	D	41	34	32	26	29	23	28 LA <sub>eq</sub>	
Night 2 19/11/2019 22:00 3.1 – 3.4 m/s SE 26-29 °C 2679354	35 dBA LA <sub>eq</sub> (15minute) 45 dBA LA <sub>1</sub> (1minute)	1	E	51	32	28	24	27	22	25 LA <sub>eq</sub> 27 LA <sub>1</sub>	<b>Site Related Noise Events:</b> Main exhaust vent fan 23-29 <b>Other Noise Events:</b> Traffic 30 Impact 47-51 Aircraft 40-49 Insects 25
		2	E	53	43	35	23	32	21	25 LA <sub>eq</sub> 26 LA <sub>1</sub>	
		3	E	41	30	27	23	25	20	24 LA <sub>eq</sub> 27 LA <sub>1</sub>	
		4	E	47	31	26	22	24	20	23 LA <sub>eq</sub> 28 LA <sub>1</sub>	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 10 Operator Attended EPL Noise Survey Results – N6 – Newhaven (Day 3)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 3 20/11/2019 11:58 4.1 – 5.5 m/s SE/ESE 36-37 °C 3003389	35 dBA L <sub>Aeq</sub> (15minute)	1	C	68	56	51	35	47	27	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Wind 48-68 Birds 30-52
		2	C	65	56	54	38	50	32	I/A	
		3	C	63	56	50	30	46	26	I/A	
		4	C	65	57	55	37	51	25	I/A	
		5	C	64	58	55	42	52	34	I/A	
		6	C	66	58	55	43	51	30	I/A	
Evening 3 20/11/2019 20:01 4 – 6.2 m/s ESE 31-32 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	D	62	50	47	42	45	39	<30 L <sub>Aeq</sub>	<b>Site Related Noise Events:</b> General mine activity 25-30 <b>Other Noise Events:</b> Wind 33-50 Traffic 34
		2	D	48	41	39	34	37	32	<25 L <sub>Aeq</sub>	
Night 3 20/11/2019 22:07 2.3 – 3.4 m/s ESE 27-28 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	F	47	42	38	30	35	28	N/M	<b>Site Related Noise Events:</b> Mine activity barely audible <b>Other Noise Events:</b> Traffic 47 Wind 30-45 Animals 48-49
		2	E	49	41	37	30	34	27	N/M	
	45 dBA L <sub>A1</sub> (1minute)	3	D	48	42	40	32	37	30	N/M	
		4	D	49	43	40	34	38	30	N/M	

Note: N/M = Not Measurable, I/A = Inaudible

### 5.1.3 Operator Attended Noise Survey Results – EPL Monitoring Location N8

Results of the operator attended noise surveys at N8 are provided in **Table 11**, **Table 12** and **Table 13**. Monitoring location N8 represents residential receptors located to the southwest of the site in Haylin View.

**Table 11 Operator Attended EPL Noise Survey Results – N8 – Haylin View (Day 1)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 1 18/11/2019 10:39 1.1 – 4.6 m/s W/WNW 26-29 °C 3011919	35 dBA L <sub>Aeq</sub> (15minute)	1	C	67	50	45	29	42	25	I/A	<b>Site Related Noise Events:</b> Inaudible  <b>Other Noise Events:</b> Wind related noise 37-52 Birds 48-67
		2	C	52	47	42	29	38	25	I/A	
		3	B	57	44	39	29	36	27	I/A	
		4	B	59	47	39	29	36	27	I/A	
		5	A	52	40	34	27	32	25	I/A	
		6	A	50	40	35	28	33	25	I/A	
Evening 1 18/11/2019 21:22 2.5 – 2.8 m/s SSW 23-25 °C 3011919	35 dBA L <sub>Aeq</sub> (15minute)	1	E	55	32	22	20	23	19	I/A	<b>Site Related Noise Events:</b> Inaudible  <b>Other Noise Events:</b> Insects 21-24 Farm animal 41-55
		2	E	44	32	22	20	23	19	I/A	

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Night 1 18/11/2019 23:40 1.3 – 3.6 m/s S/NE 21-25 °C 3011919	35 dBA L <sub>Aeq</sub> (15minute)	1	D	52	30	26	21	25	20	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Wind related noise 27-31 Insects 20-23 Birds 41-55
		2	F	45	32	21	20	23	19	I/A	
	45 dBA L <sub>A1</sub> (1minute)	3	F	55	27	21	20	23	19	I/A	
		4	F	42	27	22	19	21	18	I/A	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 12 Operator Attended EPL Noise Survey Results – N8 – Haylin View (Day 2)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 2 19/11/2019 10:42 0.8 – 2.9 m/s N/W 31-33 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	A	49	35	29	22	26	21	N/M	<b>Site Related Noise Events:</b> General mine activity barely audible <b>Other Noise Events:</b> Road traffic 24-28 Birds 45-79 Wind 29-35
		2	A	64	38	33	23	32	22	N/M	
		3	A	52	40	33	22	30	21	I/A	
		4	A	41	36	33	23	28	21	I/A	
		5	A	60	38	31	23	29	22	I/A	
		6	A	79	45	35	23	44	21	I/A	
Evening 2 19/11/2019 20:24 2.2 - 2.7 m/s SSW 29-32 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	D	54	36	27	20	26	19	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 29-33 Wind 32-36 Birds 41-54
		2	E	54	38	26	21	27	20	I/A	
Night 2 19/11/2019 22:33 3.1 – 3.4 m/s SSW 26 °C 3011919	35 dBA LA <sub>eq</sub> (15minute) 45 dBA LA <sub>1</sub> (1minute)	1	E	59	37	30	24	29	22	N/M	<b>Site Related Noise Events:</b> General mine activity barely audible <b>Other Noise Events:</b> Road traffic 30-34 Frogs / insects 24-27 Bats 47-54
		2	E	47	32	29	23	27	21	N/M	
		3	E	47	31	28	23	26	21	I/A	
		4	E	48	32	28	22	26	20	I/A	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 13 Operator Attended EPL Noise Survey Results – N8 – Haylin View (Day 3)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 3 20/11/2019 07:52 1.3 – 2.6 m/s SE/ESE 27-30 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	C	55	45	36	24	34	22	24 LA <sub>eq</sub>	<b>Site Related Noise Events:</b> General mine activity 21-24 <b>Other Noise Events:</b> Road traffic 30-34 Birds 51-71 Wind 33-37
		2	C	57	43	33	23	32	21	23 LA <sub>eq</sub>	
		3	A	68	50	39	23	38	21	N/M	
		4	C	71	53	42	24	42	22	I/A	
		5	B	32	43	32	24	34	22	I/A	
		6	C	65	45	31	23	33	21	I/A	
Evening 3 20/11/2019 20:06 4 – 6.2 m/s ESE 31-32 °C 3003389	35 dBA LA <sub>eq</sub> (15minute)	1	D	51	43	37	27	34	24	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 36-42 Birds 49-54 Frogs / insects 23-26
		2	D	54	39	32	25	31	22	I/A	
Night 3 20/11/2019 23:25 2.6 - 3.4 m/s E/SSE 26-27 °C 3003389	35 dBA LA <sub>eq</sub> (15minute) 45 dBA LA <sub>1</sub> (1minute)	1	D	52	36	31	27	30	24	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Bats 52-55 Road traffic 31-35 Frogs / insects 25-27
		2	E	43	34	32	28	30	24	I/A	
		3	D	54	37	34	28	32	23	I/A	
		4	E	55	38	33	24	31	22	I/A	

Note: N/M = Not Measurable, I/A = Inaudible



### 5.1.4 Operator Attended Noise Survey Results – EPL Monitoring Location N9

Results of the operator attended noise surveys at N9 are provided in **Table 14**, **Table 15** and **Table 16**. Monitoring location N9 represents residential receptors located to the northwest of the site in High Range.

**Table 14 Operator Attended EPL Noise Survey Results – N9 – High Range (Day 1)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 1 18/11/2019 11:46 1.1 – 3.4 m/s SW/WNW 28-30 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	A	49	45	39	28	36	25	I/A	<b>Site Related Noise Events:</b> Inaudible  <b>Other Noise Events:</b> Aircraft 50 Train 35 Wind 40-52 Animals 43-63 Car Passby 66-69
		2	A	57	43	37	26	34	22	I/A	
		3	A	63	55	47	27	43	21	I/A	
		4	A	65	60	53	27	48	22	I/A	
		5	B	69	58	49	27	47	24	I/A	
		6	B	66	61	43	25	46	22	I/A	
Evening 1 18/11/2019 19:46 2.2 – 2.5 m/s W/NW 25-27 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	D	51	41	30	19	29	17	N/M	<b>Site Related Noise Events:</b> Barely audible  <b>Other Noise Events:</b> Animals 30-51 Insects 20-25
		2	D	40	32	27	20	25	19	N/M	

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Night 1 19/11/2019 00:33 0.8 – 2.5 m/s NE 25 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute) 45 dBA L <sub>A1</sub> (1minute)	1	F	42	35	31	25	29	22	29 L <sub>Aeq</sub> 38 L <sub>A1</sub>	<b>Site Related Noise Events:</b> Main Exhaust Vent fan 26-38  <b>Other Noise Events:</b> Traffic 23-44 Animals 42
		2	D	41	36	32	27	30	24	30 L <sub>Aeq</sub> 36 L <sub>A1</sub>	
		3	E	45	36	32	27	30	24	30 L <sub>Aeq</sub> 35 L <sub>A1</sub>	
		4	F	44	40	35	28	32	26	30 L <sub>Aeq</sub> 36 L <sub>A1</sub>	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 15 Operator Attended EPL Noise Survey Results – N9 – High Range (Day 2)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 2 19/11/2019 08:41 0.4 - 2 m/s N/NE 28-30 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	A	56	48	40	25	37	22	25 L <sub>Aeq</sub>	<b>Site Related Noise Events:</b> Main exhaust vent fan 20-25 <b>Other Noise Events:</b> Local traffic 72-73 Animals 50-53 Birds 40-50
		2	A	73	56	34	23	46	21	<25 L <sub>Aeq</sub>	
		3	A	72	51	37	24	44	21	<25 L <sub>Aeq</sub>	
		4	A	72	52	42	24	44	20	<25 L <sub>Aeq</sub>	
		5	A	65	45	33	24	34	21	24 L <sub>Aeq</sub>	
		6	A	65	39	32	24	32	21	24 L <sub>Aeq</sub>	
Evening 2 19/11/2019 21:08 2.4 - 3 m/s SW/SSW 27-29 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	E	45	37	33	29	31	28	26 L <sub>Aeq</sub>	<b>Site Related Noise Events:</b> Main exhaust vent fan 25-29 <b>Other Noise Events:</b> Resident 26 Animals 39 Aircraft 45
		2	E	41	34	31	28	30	27	26 L <sub>Aeq</sub>	
Night 2 19/11/2019 23:19 1.5-1.9 m/s NW 25-27 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute) 45 dBA L <sub>A1</sub> (1minute)	1	F	52	33	30	21	27	19	N/M	<b>Site Related Noise Events:</b> Main exhaust fan barely audible <b>Other Noise Events:</b> Traffic 31-39 Animals 35-50
		2	F	37	32	28	20	25	18	N/M	
		3	E	41	34	30	22	27	19	N/M	
		4	D	50	37	32	22	29	19	N/M	

Note: N/M = Not Measurable, I/A = Inaudible

**Table 16 Operator Attended EPL Noise Survey Results – N9 – High Range (Day 3)**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 3 20/11/2019 14:44 3.2 -5.2 m/s E/ESE 38-39 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	C	76	50	43	31	43	26	I/A	<b>Site Related Noise Events:</b> Inaudible with main exhaust vent fan barely audible at end <b>Other Noise Events:</b> Traffic 76 Wind 35-57 Birds 62
		2	B	52	46	43	33	39	29	I/A	
		3	C	64	53	49	33	44	29	I/A	
		4	B	62	44	40	30	37	24	I/A	
		5	B	56	54	48	35	44	27	I/A	
		6	C	57	53	46	30	42	25	N/M	
Evening 3 20/11/2019 20:46 3 – 4.2 m/s ESE 29-30 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	D	52	41	37	33	35	30	N/M	<b>Site Related Noise Events:</b> Mine activity barely audible <b>Other Noise Events:</b> Wind 33-47 Animals 52
		2	D	47	42	38	33	36	30	N/M	
Night 3 20/11/2019 23:23 2.6 – 3.4 m/s W/WNW 26-27 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute) 45 dBA L <sub>A1</sub> (1minute)	1	D	42	34	29	22	26	19	N/M	<b>Site Related Noise Events:</b> Mine activity barely audible <b>Other Noise Events:</b> Animals 49-53 Traffic 40-49 Wind 30-34
		2	D	53	46	39	20	34	18	N/M	
		3	E	49	42	34	18	30	17	N/M	
		4	D	50	44	37	27	34	24	N/M	

Note: N/M = Not Measurable, I/A = Inaudible

### 5.1.5 Operator Attended Noise Survey Results – NMP Monitoring Location N1

Results of the operator attended noise surveys at N1 are provided in **Table 17**. Monitoring location N1 represents residential receptors located to the east of the site in Bow Hills.

**Table 17 Operator Attended NMP Noise Survey Results – N1 – Bow Hills**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 19/11/2019 13:41 3.5 m/s NNE 27 °C 2679354	35 dBA <sup>1</sup> LA <sub>eq</sub> (15minute)	1	B	51	45	40	30	37	27	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Traffic 40-51 Birds 36-45 Wind 34-40
Evening 19/11/2019 21:43 3 m/s SSW 24 °C 2679354	35 dBA <sup>1</sup> LA <sub>eq</sub> (15minute)	1	E	62	58	52	32	47	30	34 dBA	<b>Site Related Noise Events:</b> Dozer operations 34-39 Reversing tone 36 <b>Other Noise Events:</b> Traffic 43-62
Night 19/11/2019 22:32 3.3 m/s SW 24 °C 2679354	35 dBA <sup>1</sup> LA <sub>eq</sub> (15minute)	1	E	57	52	42	31	40	28	32 LA <sub>eq</sub> 38 LA <sub>1</sub>	<b>Site Related Noise Events:</b> General mine activity 30-38 <b>Other Noise Events:</b> Traffic 40-57

Note: N/M = Not Measurable, I/A = Inaudible

Note 1: A private agreement between NCOPL and the residents of N1 Bow Hills of 50 dBA LA<sub>eq</sub>(15minute) is in place. This new level of 50 dBA LA<sub>eq</sub>(15minute) replaces the levels identified in Conditions 1-3, Schedule 4 of PA 08\_0144 Mod 2 and the identical limits contained in condition L3 of Environment Protection Licence No 1278

### 5.1.6 Operator Attended Noise Survey Results – NMP Monitoring Location N3

Results of the operator attended noise surveys at N3 are provided in **Table 18**. Monitoring location N3 represents residential receptors located to the southeast of the site in Ardmona.

**Table 18 Operator Attended NMP Noise Survey Results – N3 – Ardmona**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				L <sub>Amax</sub> (dB)	L <sub>A1</sub> (dB)	L <sub>A10</sub> (dB)	L <sub>A90</sub> (dB)	L <sub>Aeq</sub> (dB)	L <sub>Amin</sub> (dB)		
Day 18/11/2019 14:06 2.9 m/s NE 26 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	A	86	77	62	31	64	27	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Traffic 40-86 Birds 30-38 Wind 30-35
Evening 19/11/2019 19:32 1.7 m/s WSW 25 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	A	85	75	60	39	63	32	<25 L <sub>Aeq</sub>	<b>Site Related Noise Events:</b> General mine activity 20-25 <b>Other Noise Events:</b> Traffic 42-85 Insects 43-47
Night 18/11/2019 22:08 3 m/s SSW 16 °C 2679354	35 dBA L <sub>Aeq</sub> (15minute)	1	E	83	74	54	28	60	26	28 L <sub>Aeq</sub> 35 L <sub>A1</sub>	<b>Site Related Noise Events:</b> Dozer operations 25-35 <b>Other Noise Events:</b> Traffic 40-83

Note: N/M = Not Measurable, I/A = Inaudible

### 5.1.7 Operator Attended Noise Survey Results – NMP Monitoring Location N7

Results of the operator attended noise surveys at N7 are provided in **Table 19**. Monitoring location N7 represents residential receptors located to the northeast of the site in Merriman.

**Table 19 Operator Attended NMP Noise Survey Results – N7 – Merriman**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 19/11/2019 12:41 2.1 m/s N 26 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	A	54	44	38	26	35	24	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 36-54 Birds 30-36
Evening 19/11/2019 19:51 2.7 m/s SW 25 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	D	54	50	45	29	40	25	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Road traffic 29-54 Insects 26 Birds 40-45
Night 20/11/2019 22:01 3.1 m/s SSW 24 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	C	53	49	45	28	40	26	27 LA <sub>eq</sub> 28 LA <sub>1</sub>	<b>Site Related Noise Events:</b> Dozer operations 25-28 <b>Other Noise Events:</b> Road traffic 39-54 Insects / frogs 26-28

Note: N/M = Not Measurable, I/A = Inaudible

### 5.1.8 Operator Attended Noise Survey Results – NMP Monitoring Location N8

Results of the operator attended noise surveys at N8 are provided in **Table 20**. Monitoring location N8 represents residential receptors located to the south of the site in Matilda.

**Table 20 Operator Attended NMP Noise Survey Results – N8 – Matilda**

Period Date/Start Time Weather SLM Details	Criteria	Measurement Number	Stability Category	Primary Noise Descriptor						Narrabri Mine Contribution, (dB)	Description
				LAm <sub>ax</sub> (dB)	LA <sub>1</sub> (dB)	LA <sub>10</sub> (dB)	LA <sub>90</sub> (dB)	LA <sub>eq</sub> (dB)	LA <sub>min</sub> (dB)		
Day 18/11/2019 12:35 2.8 m/s WSW 26 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	B	45	40	35	27	32	24	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Wind related noise 33-41 Birds 39-45
Evening 18/11/2019 21:01 2.5 m/s SSW 24 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	E	41	29	23	22	23	21	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Bat 41 Insects 22-23
Night 19/11/2019 00:49 2.2 m/s NE 23 °C 3011919	35 dBA LA <sub>eq</sub> (15minute)	1	D	47	29	22	19	22	18	I/A	<b>Site Related Noise Events:</b> Inaudible <b>Other Noise Events:</b> Wind related noise 44-47 Insects 22-24

Note: N/M = Not Measurable, I/A = Inaudible



## 6 Conclusion

SLR was engaged by Narrabri Coal Operations Pty Ltd to conduct attended noise monitoring for the Narrabri Mine in accordance with the Narrabri Mines' Noise Management Plan, Environment Protection Licence and Project Approval.

Operator attended noise monitoring was conducted at 6 locations in order to determine the noise performance of the Narrabri Mine, with compliance achieved at all locations during all time periods.

# APPENDIX A

## Acoustic Terminology

## Sound Level or Noise Level

The terms “sound” and “noise” are almost interchangeable, except that in common usage “noise” is often used to refer to unwanted sound.

Sound (or noise) consists of minute fluctuations in atmospheric pressure capable of evoking the sense of hearing. The human ear responds to changes in sound pressure over a very wide range. The loudest sound pressure to which the human ear responds is ten million times greater than the softest. The decibel (abbreviated as dB) scale reduces this ratio to a more manageable size by the use of logarithms.

The symbols SPL, L or LP are commonly used to represent Sound Pressure Level. The symbol LA represents A-weighted Sound Pressure Level. The standard reference unit for Sound Pressure Levels expressed in decibels is  $2 \times 10^{-5}$  Pa.

## 2 “A” Weighted Sound Pressure Level

The overall level of a sound is usually expressed in terms of dBA, which is measured using a sound level meter with an “A-weighting” filter. This is an electronic filter having a frequency response corresponding approximately to that of human hearing.

People’s hearing is most sensitive to sounds at mid frequencies (500 Hz to 4000 Hz), and less sensitive at lower and higher frequencies. Thus, the level of a sound in dBA is a good measure of the loudness of that sound. Different sources having the same dBA level generally sound about equally loud.

A change of 1 dBA or 2 dBA in the level of a sound is difficult for most people to detect, whilst a 3 dBA to 5 dBA change corresponds to a small but noticeable change in loudness. A 10 dBA change corresponds to an approximate doubling or halving in loudness. The table below lists examples of typical noise levels.

Sound Pressure Level (dBA)	Typical Source	Subjective Evaluation
130	Threshold of pain	Intolerable
120	Heavy rock concert	Extremely noisy
110	Grinding on steel	
100	Loud car horn at 3 m	Very noisy
90	Construction site with pneumatic hammering	
80	Kerbside of busy street	Loud
70	Loud radio or television	
60	Department store	Moderate to quiet
50	General Office	
40	Inside private office	Quiet to very quiet
30	Inside bedroom	
20	Recording studio	Almost silent

Other weightings (eg B, C and D) are less commonly used than A-weighting. Sound Levels measured without any weighting are referred to as “linear”, and the units are expressed as dB(lin) or dB.

## 3 Sound Power Level


The Sound Power of a source is the rate at which it emits acoustic energy. As with Sound Pressure Levels, Sound Power Levels are expressed in decibel units (dB or dBA), but may be identified by the symbols SWL or LW, or by the reference unit  $10^{-12}$  W.

The relationship between Sound Power and Sound Pressure may be likened to an electric radiator, which is characterised by a power rating, but has an effect on the surrounding environment that can be measured in terms of a different parameter, temperature.

## 4 Statistical Noise Levels

Sounds that vary in level over time, such as road traffic noise and most community noise, are commonly described in terms of the statistical exceedance levels LAN, where LAN is the A-weighted sound pressure level exceeded for N% of a given measurement period. For example, the LA1 is the noise level exceeded for 1% of the time, LA10 the noise exceeded for 10% of the time, and so on.

The following figure presents a hypothetical 15 minute noise survey, illustrating various common statistical indices of interest.

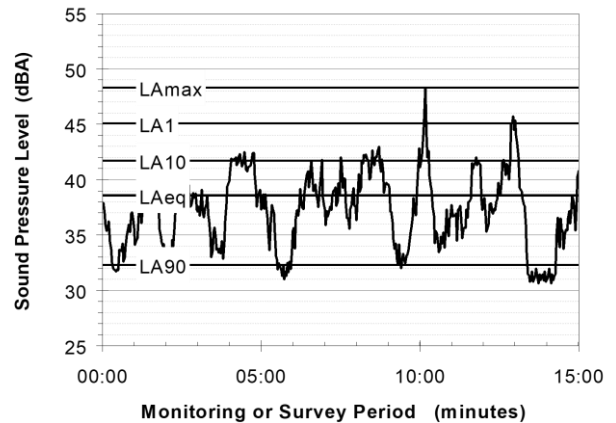

Of particular relevance, are:

- LA1 The noise level exceeded for 1% of the 15 minute interval.
- LA10 The noise level exceeded for 10% of the 15 minute interval. This is commonly referred to as the average maximum noise level.
- LA90 The noise level exceeded for 90% of the sample period. This noise level is described as the average minimum background sound level (in the absence of the source under consideration), or simply the background level.
- LAeq The A-weighted equivalent noise level (basically the average noise level). It is defined as the steady sound level that contains the same amount of acoustical energy as the corresponding time-varying sound.

When dealing with numerous days of statistical noise data, it is sometimes necessary to define the typical noise levels at a given monitoring location for a particular time of day. A standardised method is available for determining these representative levels.

This method produces a level representing the “repeatable minimum” LA90 noise level over the daytime and night-time measurement periods, as required by the EPA. In addition the method produces mean or “average” levels representative of the other descriptors (LAeq, LA10, etc).

## 5 Tonality

Tonal noise contains one or more prominent tones (ie distinct frequency components), and is normally regarded as more offensive than “broad band” noise. 7. Impulsiveness

## 6 Impulsiveness

An impulsive noise is characterised by one or more short sharp peaks in the time domain, such as occurs during hammering.

## 7 Frequency Analysis


Frequency analysis is the process used to examine the tones (or frequency components) which make up the overall noise or vibration signal. This analysis was traditionally carried out using analogue electronic filters, but is now normally carried out using Fast Fourier Transform (FFT) analysers.

The units for frequency are Hertz (Hz), which represent the number of cycles per second.

Frequency analysis can be in:

- Octave bands (where the centre frequency and width of each band is double the previous band)
- 1/3 octave bands (3 bands in each octave band)
- Narrow band (where the spectrum is divided into 400 or more bands of equal width)

The following figure shows a 1/3 octave band frequency analysis where the noise is dominated by the 200 Hz band. Note that the indicated level of each individual band is less than the overall level, which is the logarithmic sum of the bands.

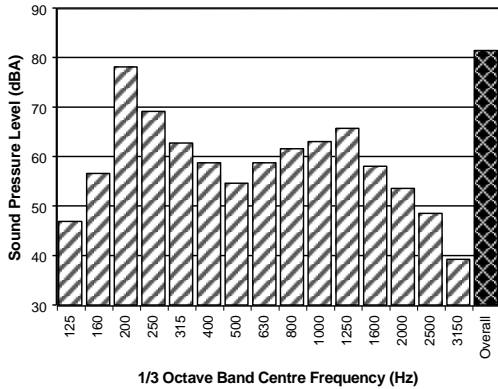

## 8 Vibration

Vibration may be defined as cyclic or transient motion. This motion can be measured in terms of its displacement, velocity or acceleration. Most assessments of human response to vibration or the risk of damage to buildings use measurements of vibration velocity. These may be expressed in terms of “peak” velocity or “rms” velocity.

The former is the maximum instantaneous velocity, without any averaging, and is sometimes referred to as “peak particle velocity”, or PPV. The latter incorporates “root mean squared” averaging over some defined time period.

Vibration measurements may be carried out in a single axis or alternatively as triaxial measurements. Where triaxial measurements are used, the axes are commonly designated vertical, longitudinal (aligned toward the source) and transverse.

The common units for velocity are millimetres per second (mm/s). As with noise, decibel units can also be used, in which case the reference level should always be stated. A vibration level  $V$ , expressed in mm/s can be converted to decibels by the formula  $20 \log (V/V_0)$ , where  $V_0$  is the reference level ( $10^{-9}$  m/s). Care is required in this regard, as other reference levels may be used by some organizations.

## 9 Human Perception of Vibration

People are able to “feel” vibration at levels lower than those required to cause even superficial damage to the most susceptible classes of building (even though they may not be disturbed by the motion). An individual’s perception of motion or response to vibration depends very strongly on previous experience and expectations, and on other connotations associated with the perceived source of the vibration. For example, the vibration that a person responds to as “normal” in a car, bus or train is considerably higher than what is perceived as “normal” in a shop, office or dwelling.

## 10 Over-pressure


The term “over-pressure” is used to describe the air pressure pulse emitted during blasting or similar events. The peak level of an event is normally measured using a microphone in the same manner as linear noise (ie unweighted), at frequencies both in and below the audible range.

Ground-borne Noise, Structure-borne Noise and Regenerated Noise

Noise that propagates through a structure as vibration and is radiated by vibrating wall and floor surfaces is termed “structure-borne noise”, “ground-borne noise” or “regenerated noise”. This noise originates as vibration and propagates between the source and receiver through the ground and/or building structural elements, rather than through the air.

Typical sources of ground-borne or structure-borne noise include tunnelling works, underground railways, excavation plant (eg rockbreakers), and building services plant (eg fans, compressors and generators).

The following figure presents the various paths by which vibration and ground-borne noise may be transmitted between a source and receiver for construction activities occurring within a tunnel.

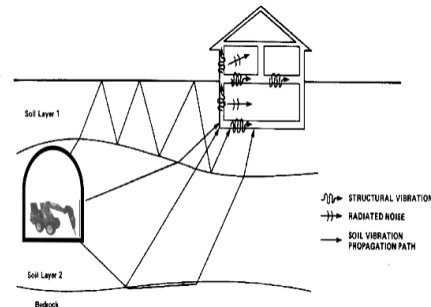

The term “regenerated noise” is also used in other instances where energy is converted to noise away from the primary source. One example would be a fan blowing air through a discharge grill. The fan is the energy source and primary noise source. Additional noise may be created by the aerodynamic effect of the discharge grill in the airstream. This secondary noise is referred to as regenerated noise

# APPENDIX B

## Calibration Certificates

**CALIBRATION OF:**

Manufacturer:	Brüel & Kjær		
Hand-held Analyzer Type:	Type: 2270	Serial No.:	2679354
Application:	Type: BZ-7233	Version No.:	4.6.3
Intensity Probe Type:	Type: 3654	Serial No.:	2783762
Customer identification:	-		

**CUSTOMER:**

SLR Consulting Australia Pty Ltd  
PO Box 176  
2066 Lane Cove  
New South Wales  
Australia

**CALIBRATION CONDITIONS:**

Preconditioning:	4 hours at 23° C ± 3° C
Environment conditions:	Air Temperature: 23 °C ± 3 °C
	Air Pressure: 101,3 kPa ± 5 kPa
	Relative Humidity: 50% RH ± 25% RH

**PROCEDURE:**

The pressure residual intensity index for the complete system is then calibrated in accordance with the demands in IEC 1043 class 1 using the Brüel & Kjær calibration procedure P\_3654\_A05.

**RESULTS:**

Calibration after repair or adjustment

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%. The standard uncertainty of measurement has been determined in accordance with EA-4/02

Date of Calibration: 2017-09-01

Certificate Issued: 2017-09-01



Nicki Eriksen  
Calibration Technician

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

**RESULTS:**

List of performed (sub)tests with status:

"OK" Means the result of the test is within tolerances.

"-" Means the result of the test is outside these tolerances.

Visual inspection:

	Result accepted?
Visual inspection	OK

Status of System Elements:

	Calibration Date	Result accepted?
Calibration of microphones	2017-09-01	OK <sup>2</sup>

<sup>1)</sup> Accredited calibration, Environmental conditions 23°C ± 3°C, 1013 hPa ± 5 hPa

<sup>2)</sup> Factory calibration, Environmental conditions 23°C ± 2°C, > 960 hPa

Sound Pressure Calibration:

Measured Value Channel A [dB re 1V/Pa]	Measured Value Channel B [dB re 1V/Pa]	Deviation [dB]	Maximum Deviation [±dB]	Calibration Uncertainty [dB]
-38,75	-38,39	0,35	1,00	0,24

3654 Gain Diviation	Open-circuit Sensitivity [dB re 1V/Pa]	Measured Value [dB re 1V/Pa]	Deviation [dB]	Calibration Uncertainty [dB]
Mic. Part 1	-38,40	-38,75	-0,35	0,24
Mic. Part 2	-38,20	-38,39	-0,19	0,24

## CERTIFICATE OF CALIBRATION



The Calibration Laboratory  
Skodsborgevej 307 DK-2850 Nærum Denmark

No.: CDK1706457

Page 3 of 3

Measurement of the P-I index for the system:

Minimum levels are in accordance with IEC 1043 class 1 limits, with a 12 spacer

Frequency [Hz]	Min. Level [dB]	Direction	Measured P-I index [dB]	Calibration Uncertainty [dB]
50	9		23,6	< 1
63	10		25,1	< 1
80	11		25,6	< 1
100	12		27,2	< 1
125	13		29,6	< 1
160	14		33,2	< 1
200	15		37,7	< 1
250	16		40,7	< 1
315	16	-	36,8	< 1
400	16	-	45,6	< 1
500	16		40,5	< 1
630	16		27,7	< 1
800	16	-	27,2	< 1
1000	16	-	27,1	< 1
1250	16	-	35,9	< 1
1600	16	-	26,8	< 1
2000	16	-	33,5	< 1
2500	16		34,6	< 1
3150	16		32,6	< 1
4000	16		29,1	< 1
5000	16		27,8	< 1

System configuration:

Part 1 to channel: A

Part 2 to channel: B

Notes:

### CALIBRATION EQUIPMENT:

Description	Type	Serial No.
Pistonphone	4228	1908475
Intensity Coupler	UA-0914	1913431
Sound Source	ZI-0055	-
Vaisala Barometer	PTB100A	U2450020
Vaisala Thermometer	HMT331	C1750032



# CERTIFICATE OF CALIBRATION

CERTIFICATE No.: **SLM 25561 & FILT 5417**

**Equipment Description:** Sound Level Meter

**Manufacturer:** B&K

**Model No:** 2250      **Serial No:** 3011919

**Microphone Type:** 4952      **Serial No:** 3094024

**Preamplifier Type:** N/A      **Serial No:** N/A

**Filter Type:** 1/3 Octave      **Serial No:** 3011919

**Comments:** All tests passed for class 1.  
(See over for details)

**Owner:** SLR Consulting Australia Pty Ltd  
Level 2, 2 Lincoln Street  
Lane Cove, NSW 2066

**Ambient Pressure:** 1001 hPa  $\pm 1.5$  hPa

**Temperature:** 24 °C  $\pm 2^\circ$  C      **Relative Humidity:** 27%  $\pm 5\%$

**Date of Calibration:** 16/09/2019      **Issue Date:** 17/09/2019

**Acu-Vib Test Procedure:** AVP10 (SLM) & AVP06 (Filters)

**CHECKED BY:** *J.K.*      **AUTHORISED SIGNATURE:** *Hein Sod*

Accredited for compliance with ISO/IEC 17025 - Calibration  
The results of the tests, calibration and/or measurements included in this document are traceable to



Accredited Lab. No. 9262  
Acoustic and Vibration  
Measurements

**HEAD OFFICE**  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
Tel: (02) 96808133 Fax: (02) 96808233  
Mobile: 0413 809806  
web site: www.acu-vib.com.au

Page 1 of 2  
AVCERT10 Rev. 1.3 15.05.18

**CERTIFICATE No.: SLM 25561 & FILT 5417**

The performance characteristics listed below were tested. The tests are based on the relevant clauses of IEC 61672-3:2013

<b>Tests Performed:</b>	<i>Clause</i>	<i>Result</i>
<i>Absolute Calibration</i>	10	Pass
<i>Acoustical Frequency Weighting</i>	12	Pass
<i>Self Generated Noise</i>	11.1	Entered
<i>Electrical Noise</i>	11.2	Entered
<i>Long Term Stability</i>	15	Pass
<i>Electrical Frequency Weightings</i>	13	Pass
<i>Frequency and Time Weightings</i>	14	Pass
<i>Reference Level Linearity</i>	16	Pass
<i>Range Level Linearity</i>	17	NA
<i>Toneburst</i>	18	Pass
<i>Peak C Sound Level</i>	19	Pass
<i>Overload Indicator</i>	20	Pass
<i>High Level Stability</i>	21	Pass

**Statement of Compliance:** The sound level meter submitted for testing has successfully completed the class 1 periodic tests of IEC 61672-3:2013, for the environmental conditions under which the tests were performed. As public evidence was available, from an independent organization responsible for approving the results of pattern evaluation tests performed in accordance with IEC 61672-2:2013, to demonstrate that the model of sound level meter fully conformed to the requirements in IEC 61672-1:2013, the sound level meter submitted for testing conforms to the class 1 requirements of IEC61672-1:2013. A full technical report is available if required.

**This Sound Level Meter included an Octave Filter Set. Tests were based on IEC 1260: 1995 and AS/NZS 4476 - 1997 and were conducted to test the following performance characteristics:**

1. Relative attenuation clause 5.3

**Date of Calibration:** 16/09/2019      **Issue Date:** 17/09/2019

**Checked by:** *[Signature]*

Accredited for compliance with ISO/IEC 17025 - Calibration  
The results of the tests, calibration and/or measurements included in this document are traceable to Australian/national standards.



Accredited Lab. No. 9262  
Acoustic and Vibration  
Measurements



**HEAD OFFICE**  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
Tel: (02) 96808133 Fax: (02)96808233  
Mobile: 0413 809806  
web site: www.acu-vib.com.au

# CERTIFICATE OF CALIBRATION

CERTIFICATE NO.: SLM 23293 & FILT 4792

**Equipment Description:** Sound & Vibration Analyser

**Manufacturer:** B&K

**Model No:** 2250      **Serial No:** 3003389

**Microphone Type:** 4950      **Serial No:** 2913816

**Preamplifier Type:** ZC0032      **Serial No:** 20519

**Filter Type:** 1/3 Octave      **Serial No:** 3003389

**Comments:** All tests passed for class 1.  
(See over for details)

**Owner:** SLR Consulting Australia Pty Ltd  
Level 2, 2 Lincoln Street  
Lane Cove, NSW 2066

**Ambient Pressure:** 990 hPa  $\pm 1.5$  hPa

**Temperature:** 25 °C  $\pm 2^\circ$  C      **Relative Humidity:** 29%  $\pm 5\%$

**Date of Calibration:** 06/08/2018      **Issue Date:** 07/08/2018

**Acu-Vib Test Procedure:** AVP10 (SLM) & AVP06 (Filters)

**CHECKED BY:** *[Signature]*      **AUTHORISED SIGNATURE:** *[Signature]*  
*Jack Rielt*

Accredited for compliance with ISO/IEC 17025 - Calibration  
The results of the tests, calibration and/or measurements included in this document are traceable to Australian/national standards.



Accredited Lab. No. 9262  
Acoustic and Vibration  
Measurements



**HEAD OFFICE**  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
Tel: (02) 96808133      Fax: (02) 96808233  
Mobile: 0413 809806  
web site: www.acu-vib.com.au

Page 1 of 2  
AVCERT10 Rev. 1.3 15.05.18

**CERTIFICATE NO.: SLM 23293 & FILT 4792**

The performance characteristics listed below were tested. The tests are based on the relevant clauses of IEC 61672-3:2013


Tests Performed:	Clause	Result
Absolute Calibration	10	Pass
Acoustical Frequency Weighting	12	Pass
Self Generated Noise	11.1	Entered
Electrical Noise	11.2	Entered
Long Term Stability	15	Pass
Electrical Frequency Weightings	13	Pass
Frequency and Time Weightings	14	Pass
Reference Level Linearity	16	Pass
Range Level Linearity	17	NA
Toneburst	18	Pass
Peak C Sound Level	19	Pass
Overload Indicator	20	Pass
High Level Stability	21	Pass

**Statement of Compliance:** The sound level meter submitted for testing has successfully completed the class 1 periodic tests of IEC 61672-3:2013, for the environmental conditions under which the tests were performed. As public evidence was available, from an independent organization responsible for approving the results of pattern evaluation tests performed in accordance with IEC 61672-2:2013, to demonstrate that the model of sound level meter fully conformed to the requirements in IEC 61672-1:2013, the sound level meter submitted for testing conforms to the class 1 requirements of IEC61672-1:2013.  
A full technical report is available if required.

**This Sound Level Meter included an Octave Filter Set. Tests were based on IEC 1260: 1995 and AS/NZS 4476 - 1997 and were conducted to test the following performance characteristics:**

1. Relative attenuation clause 5.3

**Date of Calibration:** 06/08/2018      **Issue Date:** 07/08/2018

**Checked by:**  Accredited for compliance with ISO/IEC 17025 - Calibration  
The results of the tests, calibration and/or measurements included in this document are traceable to Australian/national standards.



Accredited Lab. No. 9262  
Acoustic and Vibration  
Measurements



**HEAD OFFICE**  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
Tel: (02) 96808133 Fax: (02)96808233  
Mobile: 0413 809806  
web site: www.acu-vib.com.au

## ASIA PACIFIC OFFICES

### BRISBANE

Level 2, 15 Astor Terrace  
Spring Hill QLD 4000  
Australia  
T: +61 7 3858 4800  
F: +61 7 3858 4801

### CANBERRA

GPO 410  
Canberra ACT 2600  
Australia  
T: +61 2 6287 0800  
F: +61 2 9427 8200

### DARWIN

Unit 5, 21 Parap Road  
Parap NT 0820  
Australia  
T: +61 8 8998 0100  
F: +61 8 9370 0101

### GOLD COAST

Level 2, 194 Varsity Parade  
Varsity Lakes QLD 4227  
Australia  
M: +61 438 763 516

### MACKAY

21 River Street  
Mackay QLD 4740  
Australia  
T: +61 7 3181 3300

### MELBOURNE

Suite 2, 2 Domville Avenue  
Hawthorn VIC 3122  
Australia  
T: +61 3 9249 9400  
F: +61 3 9249 9499

### NEWCASTLE

10 Kings Road  
New Lambton NSW 2305  
Australia  
T: +61 2 4037 3200  
F: +61 2 4037 3201

### PERTH

Ground Floor, 503 Murray Street  
Perth WA 6000  
Australia  
T: +61 8 9422 5900  
F: +61 8 9422 5901

### SYDNEY

2 Lincoln Street  
Lane Cove NSW 2066  
Australia  
T: +61 2 9427 8100  
F: +61 2 9427 8200

### TOWNSVILLE

Level 1, 514 Sturt Street  
Townsville QLD 4810  
Australia  
T: +61 7 4722 8000  
F: +61 7 4722 8001

### TOWNSVILLE SOUTH

12 Cannan Street  
Townsville South QLD 4810  
Australia  
T: +61 7 4772 6500

### WOLLONGONG

Level 1, The Central Building  
UoW Innovation Campus  
North Wollongong NSW 2500  
Australia  
T: +61 404 939 922

### AUCKLAND

68 Beach Road  
Auckland 1010  
New Zealand  
T: +64 27 441 7849

### NELSON

6/A Cambridge Street  
Richmond, Nelson 7020  
New Zealand  
T: +64 274 898 628